


PLAN

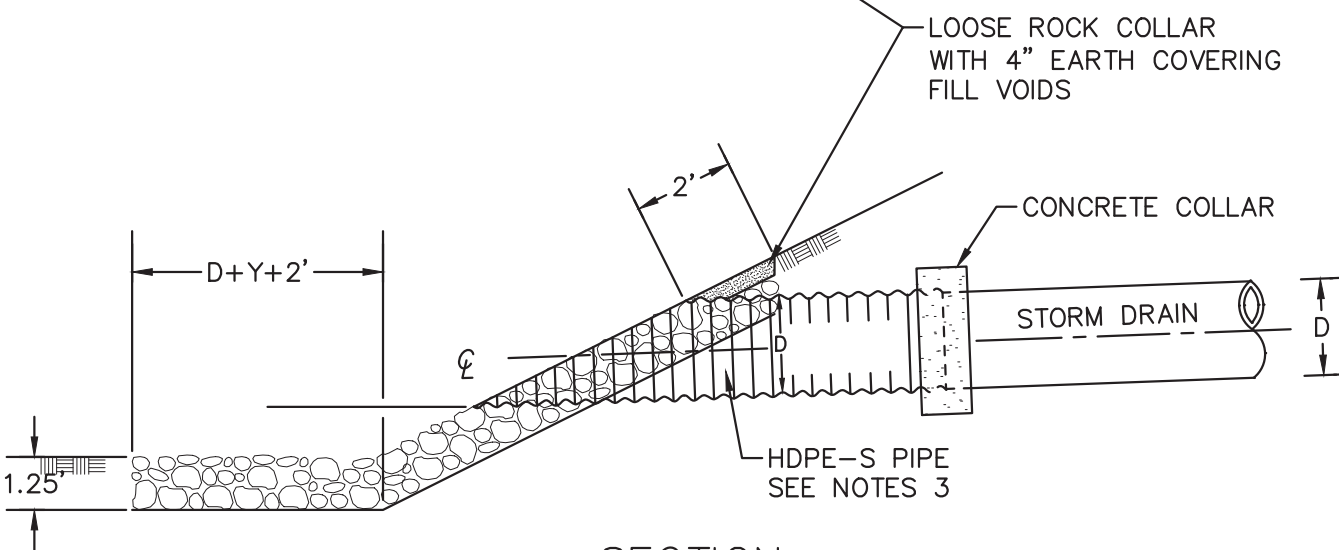

SECTION

WHEN $D < 24"$ $Y = 2'$
 WHEN $D \geq 24"$ $Y = 1'$
 UNLESS OTHERWISE SHOWN ON PLANS

NOTES:

1. ROCK SLOPE PROTECTION SHALL BE CLASS LIGHT, METHOD B PER SECTION 72 OF STATE STANDARD SPECIFICATIONS. VELOCITIES IN EXCESS OF 10 FPS SHALL REQUIRE HYDRAULIC DESIGN BY A LICENSED ENGINEER.
2. ANY DISCHARGE INTO WATER AGENCY CHANNEL WILL REQUIRE PERMITS FROM THE WATER AGENCY.
3. SEE SECTION 64 OF THE CALTRANS SPECIFICATIONS FOR HDPE PIPE REQUIREMENTS.
4. IN STEEPER APPLICATIONS, USE HDPE-C PIPE.

COUNTY OF SONOMA DEPARTMENT OF TRANSPORTATION AND PUBLIC WORKS		
STORM DRAIN OUTLET ROCK SLOPE PROTECTION		
DATE: MAY 2004	REVISED: JULY 2018	
APPROVED BY: JH	SCALE: NONE	DRAWING NO. 402