


Xrefs: S:\ENGINEERING\Traffic\STAFF FOLDERS\Chet\Draft Revised Standards\Revised_County Standards_Master.dwg Plot Date: Jun 07, 2019 at 13:15
 Path: S:\ENGINEERING\Traffic\STAFF FOLDERS\Chet\Draft Revised Standards\Revised_County Standards_Master.dwg

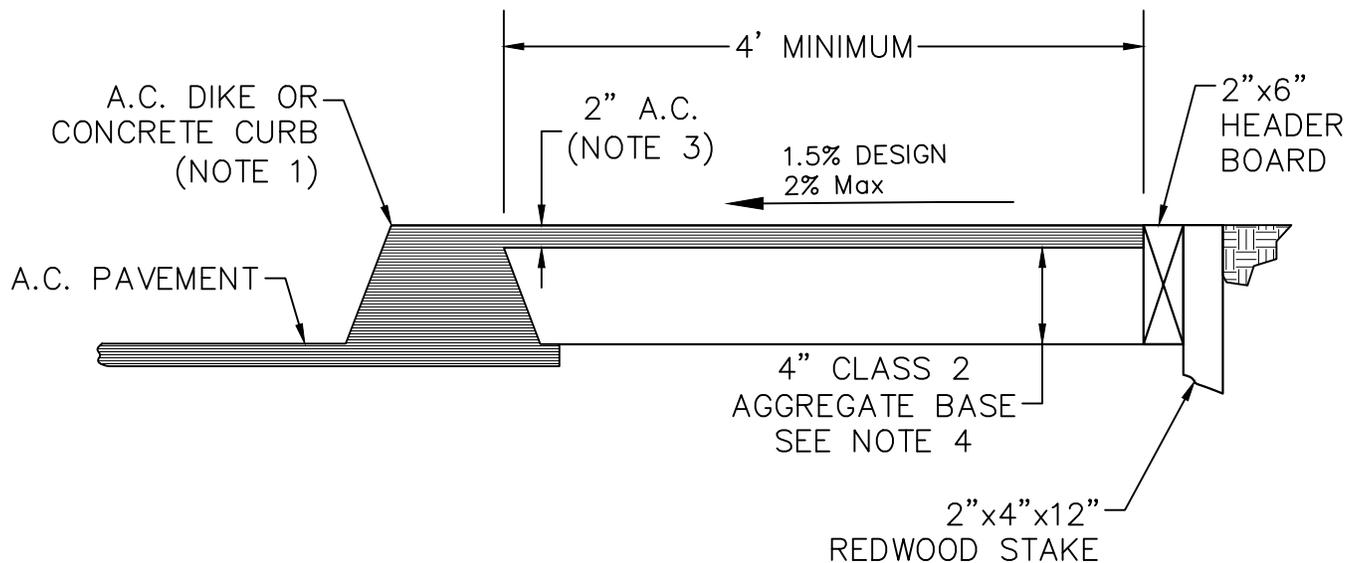

NOTES:

1. IF THERE IS NO DIKE OR CURB, AND AC WALKWAY IS ABOVE EXISTING GROUND, INSTALL A 2" X 6" HEADER BOARD ON BOTH SIDES. HEADER BOARD SHALL BE REDWOOD OR PRESSURE TREATED.
2. IF AC WALKWAY IS BELOW EXISTING GROUND, HEADER BOARD MAY BE ELIMINATED.
3. ASPHALT CONCRETE SHALL BE A MINIMUM OF 2-1/2" THICK AT DRIVEWAYS.
4. INCREASE AGGREGATE BASE TO 6" AT DRIVEWAYS.
5. BASE MATERIAL SHALL BE COMPACTED TO A RELATIVE DENSITY OF 95%.

COUNTY OF SONOMA DEPARTMENT OF TRANSPORTATION AND PUBLIC WORKS		
ASPHALT CONCRETE WALKWAY		
DATE: MAY 2004	REVISED: JULY 2018	
APPROVED BY:	SCALE: NONE	DRAWING NO. 228